



EJOT Corremaks JZ1/JA1 - self-tapping screws for fastening of construction parts with high corrosion risk



When using screws without seal washer the clamp area increases by 3 mm.

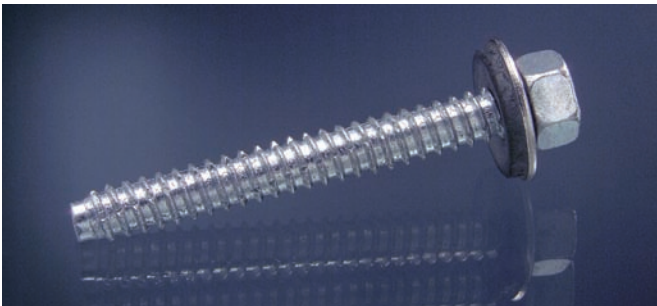

Characteristics:

- ❑ self-tapping screws from austenitic stainless steel A5 1.4529
- ❑ high solidness of the thread flank through a special production technology
- ❑ approved by DIBT

Advantages:

- ❑ material with highest corrosion resistance (according to authorisation Z-30.3-6 resistance class IV)
- ❑ process-sure installation in steel constructions (S320GD and S235Jxx, respectively)
- ❑ maximum corrosion protection

Benefits:

- ❑ applicable in constructions with highest corrosion risk through exposure to chloride and sulphur dioxide as well as concentrated pollutants
- ❑ easy static measuring approved by Deutsches Institut für Bautechnik Z-14.1-4
- ❑ maximum safety
- ❑ avoidance of costly complaints

Areas of application:

- ❑ swimming pools
- ❑ salt warehouses
- ❑ composting plants
- ❑ in the area of seawater
- ❑ tunnel constructions
- ❑ underground car parks
- ❑ electroplating
- ❑ chemical plants

Product range:

Name	Ø mm	Length mm	Clamp area ≤ mm
EJOT Corremaks JZ1	6,3 x	22	9
EJOT Corremaks JA1	6,5 x	22	9
EJOT Corremaks JA1	6,5 x	64	51
Special lengths upon request			



EJOT®



**EJOT Corremaks
JZ1/JA1**

**maximum corrosion
protection for
maximum safety**